


PDDI002-W12-120-ISO

Specification


120 Watt DC-DC Converters

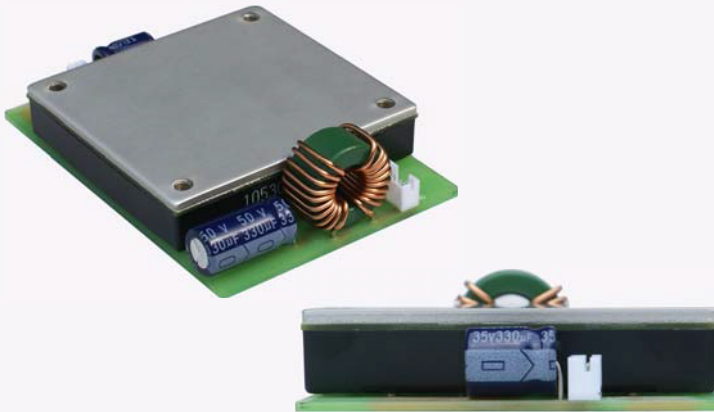

Features

- 4:1 Input Range
- 120 W Isolated Output Power
- High-Density
- Open-Frame or Enclosure type Option
- Standard “Half-Brick” Package
- Input Under and Overvoltage Shutdown
- Remote on/off Control
- Safety Approvals Pending
- RoHS Compliant

General


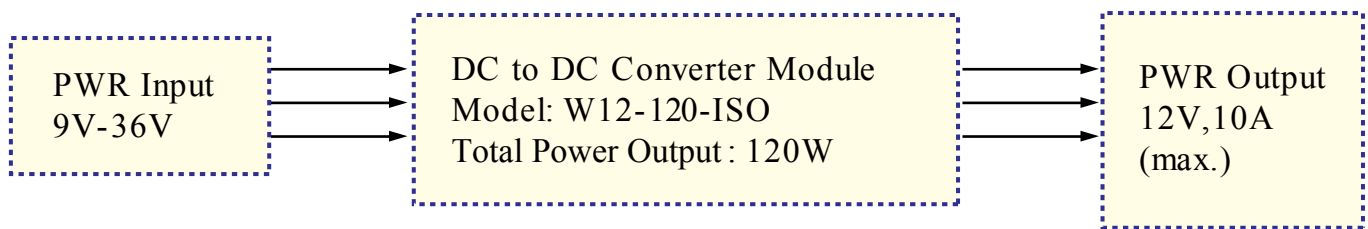


Mechanical

Open Frame Type

Enclosure Type

With Heatsink: TBD

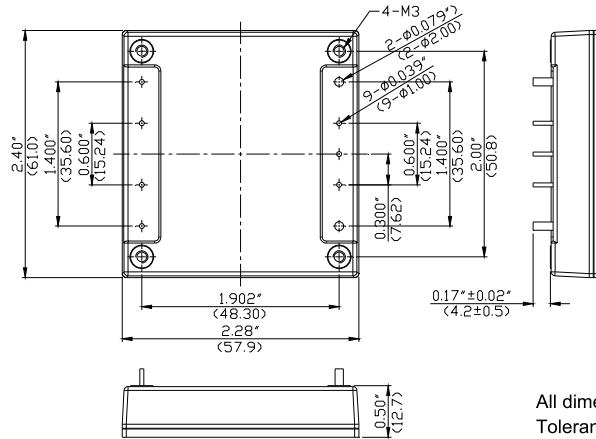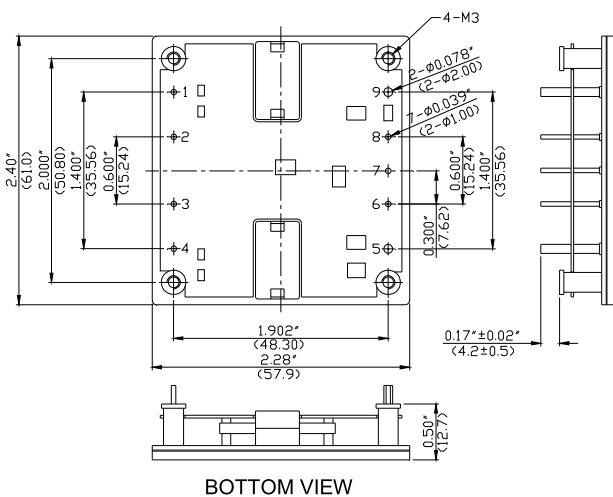

All dimensions in inches (mm).
Tolerance .xx= ±0.04"
.xxx=±0.010"

Input Specification

Input Voltage Range	24V	9-36V
Input Voltage peak/surge	24V	50V/100ms max.
Input Filter	Pi Network	
Input Turn-On Voltage	24V	10 VDC typ.
Input Undervoltage Shutdown	24V	8 VDC typ.

Output Specification

Voltage Accuracy ¹ ,.....	±1.5%max.
Transient Response ²	
Single, 25% step Load Change	<500u sec.
External Trim Adj. Range	±10%
Short Circuit Protection	Continuous
Line Regulation ³ ,.....	±0.5% max.
Load Regulation ⁴	±1.0% max.
Ripple and Noise, 20MHz BW ⁵ ,	
3.3V, 5V	100mV p-p max.
12V, 15V,.....	200mV p-p max.
Oversvoltage Protection ⁶ , 3.3V	4.3V typ.
5.0V	6.2V typ.
12V	15V typ.
15V	18V typ.

General Specification

Efficiency	See Table
Isolation Voltage	1500 VDC min.
Switch Frequency	330KHz
Isolation Resistance ⁷	108 Ohms min.
Over temperature shutdown point ⁸ , 9	120°C typ.
Operation Temperature ⁹	-40°C to +120°C
Storage Temperature Range	-55°C to +125°C
EMI/RFI Conducted ¹⁰	EN55022 Level A/B
Dimensions	3.40*2.4*1.4 inches (86 x 61 x 34 mm)
Weight	80g

Pin Assignment

Pin Connections

Pin	Function
1	12VDC
2	GND
3	GND
4	GND
5	12VDC
6	12VDC

Winsonic®

Winsonic Electronics CO.,LTD. TEL:886-3-3704789 FAX:886-3-3704722 E-mail:sales@ewinsonic.com
No.290-1 Wun-Jhong Rd. Taoyuan City, Taoyuan Taiwan R.O.C